


Wireless Button Accessories – Data Sheet



- 315 MHz and 433.92 MHz options
 - DC Power
 - RS232 serial output
 - 1 button and 4 button transmitters
 - ABS housing for outdoor use
 - Non housing version
 - M12 connection
- The wireless button accessories can be used in Rinstrum indicator products to send signals to indicators wirelessly. Two RF frequencies are available to suite various regions. Two variants are available depending on mounting requirements.
- **Non housing version** suitable for mounting directly in X320's or ABS cabinets.
 - **ABS Housing** with M12 version suitable for outdoor use.



Smart Weighing

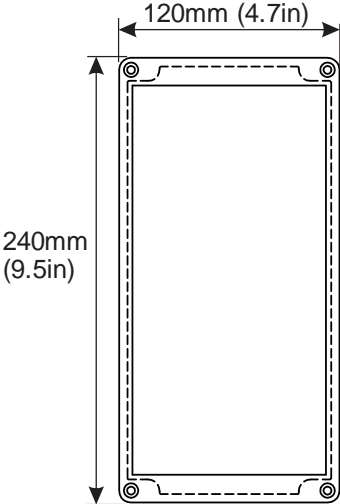
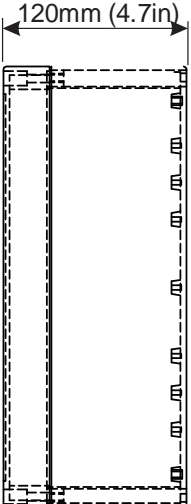
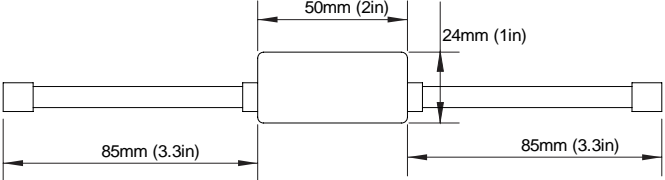
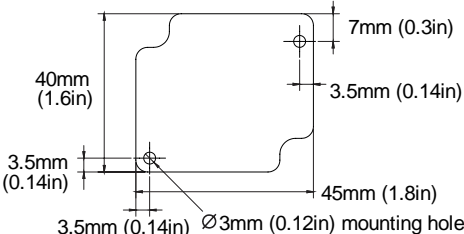
Remote key press

- Install non housing version in washdown X320 indicator
- Remote Zero, Tare, Select and Print key press

now that's smart weighing...

Wireless Button Accessories Specification Table

Wireless Button Accessories	
Power input	9V – 28V DC
RF frequency	2 available model families: 315 MHz 433.92 MHz
Serial communication	RS232 with 9600 baud rate, No parity, 8 data bits and 1 stop bit
Protocol	Format 1 - Unique identifier for each transmitter and each button Format 2 – Short and long press of keys for R300/X320/R400 indicators: <ul style="list-style-type: none"> - Zero – Button 1 - Tare – Button 2 - Select – Button 3 - Print or f1 – Button 4

Wireless Button Accessories	
ABS housing version	
Front View 	Side View 
Non housing version	
Antenna 	Board 

Specifications are subject to variation for improvement without notice. Illustrations are indications only and variation may be evident between products.